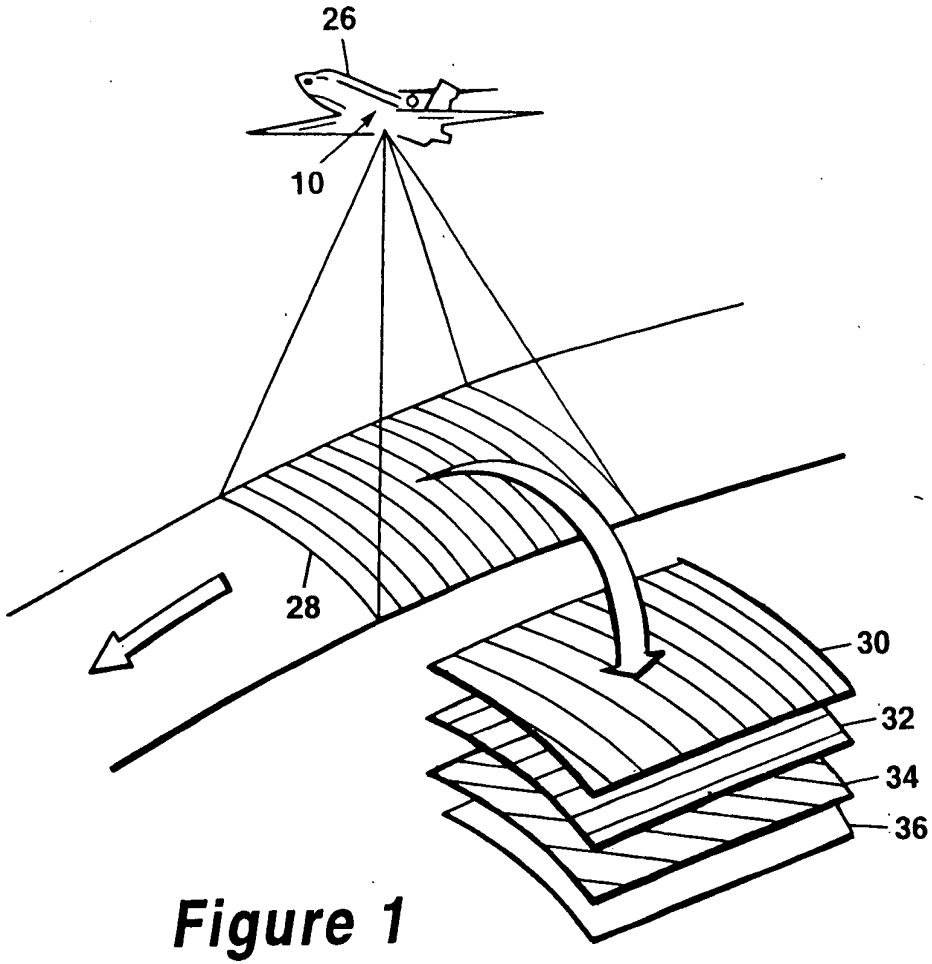

Figure 1

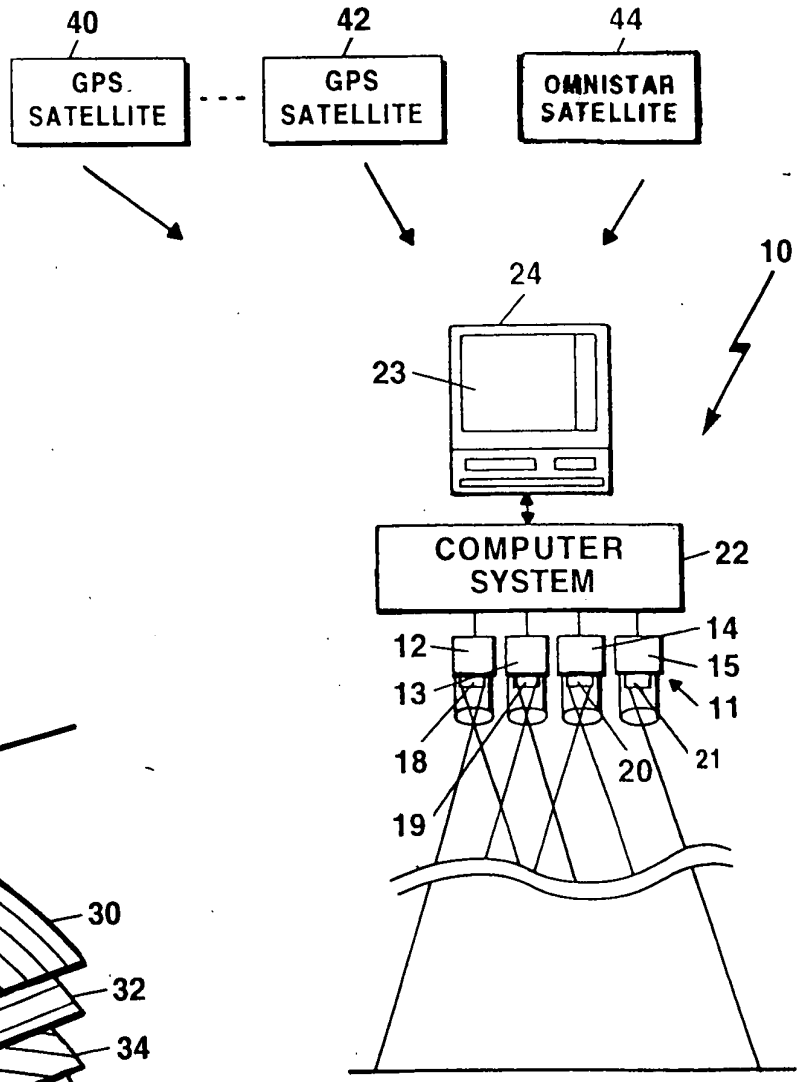

Figure 2

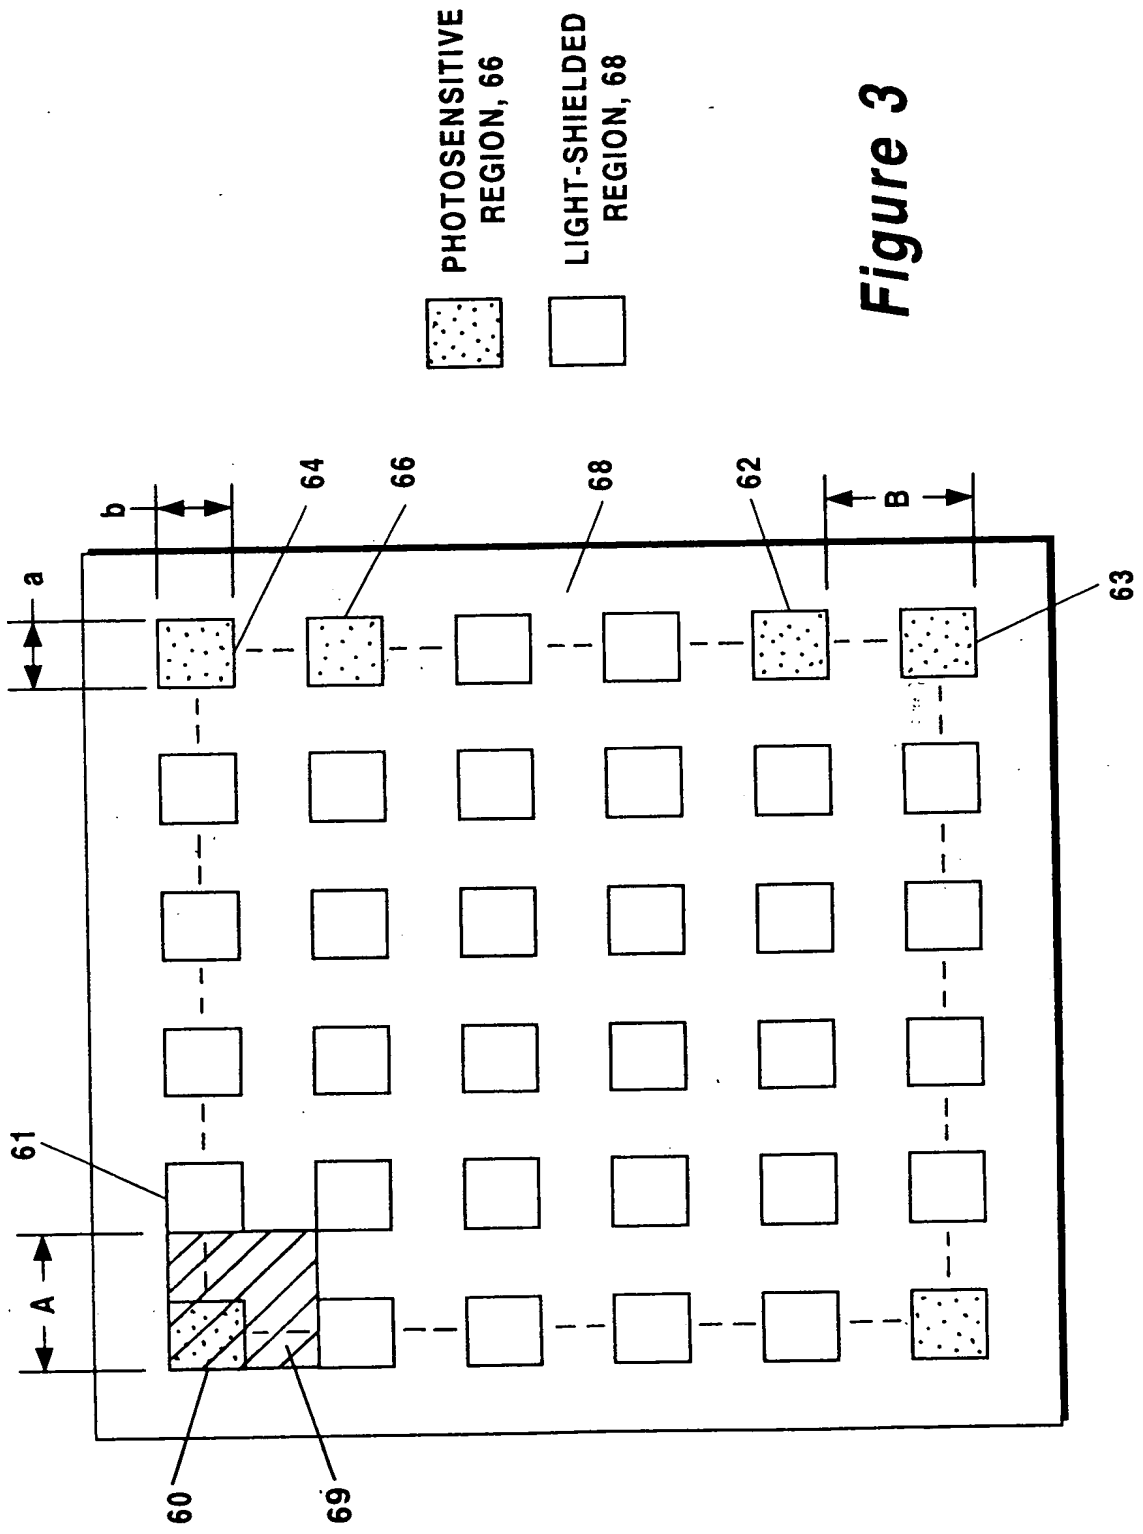
PHOTOSENSITIVE REGION, 66
LIGHT-SHIELDED REGION, 68
b
a
64
66
68
62
B
63
61
A
60
69

Figure 3

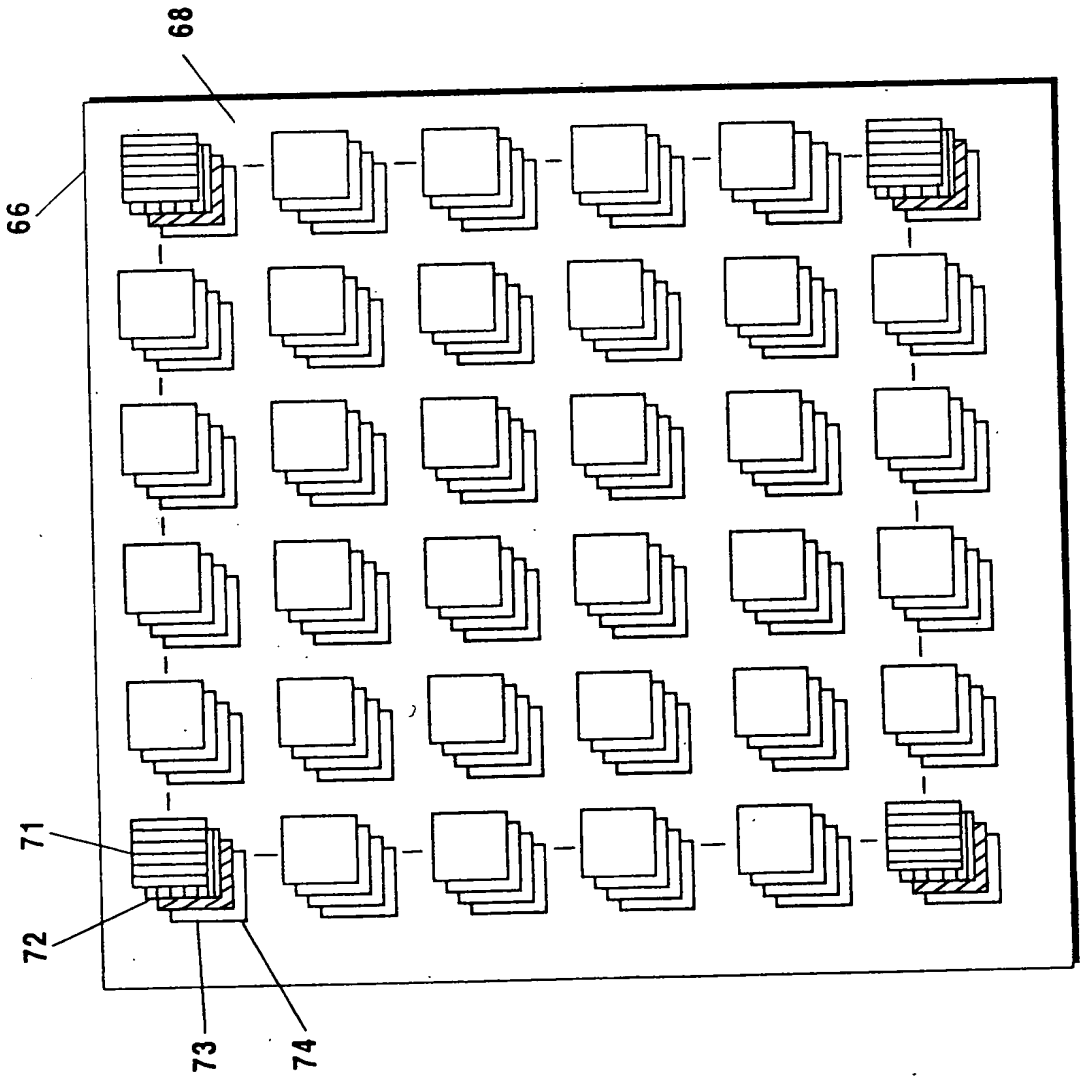

Figure 4

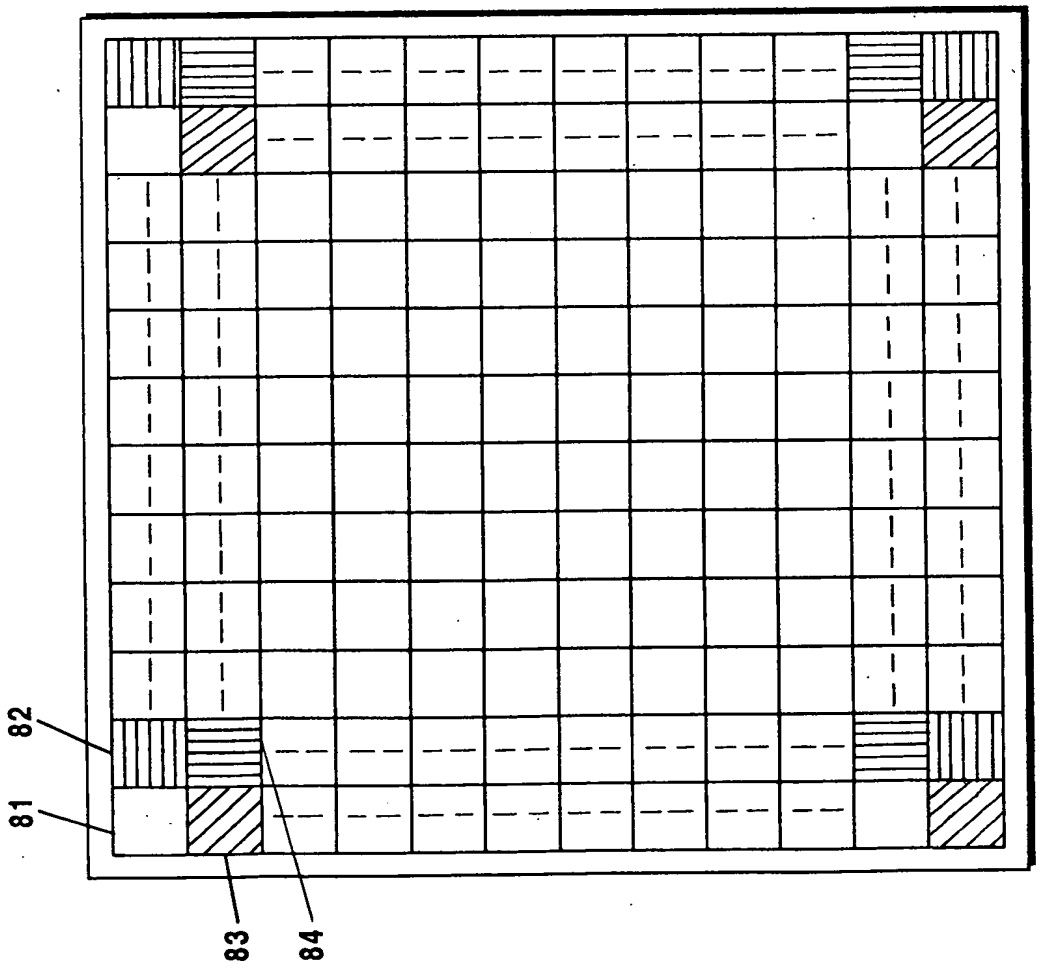

Figure 5

Figure 6

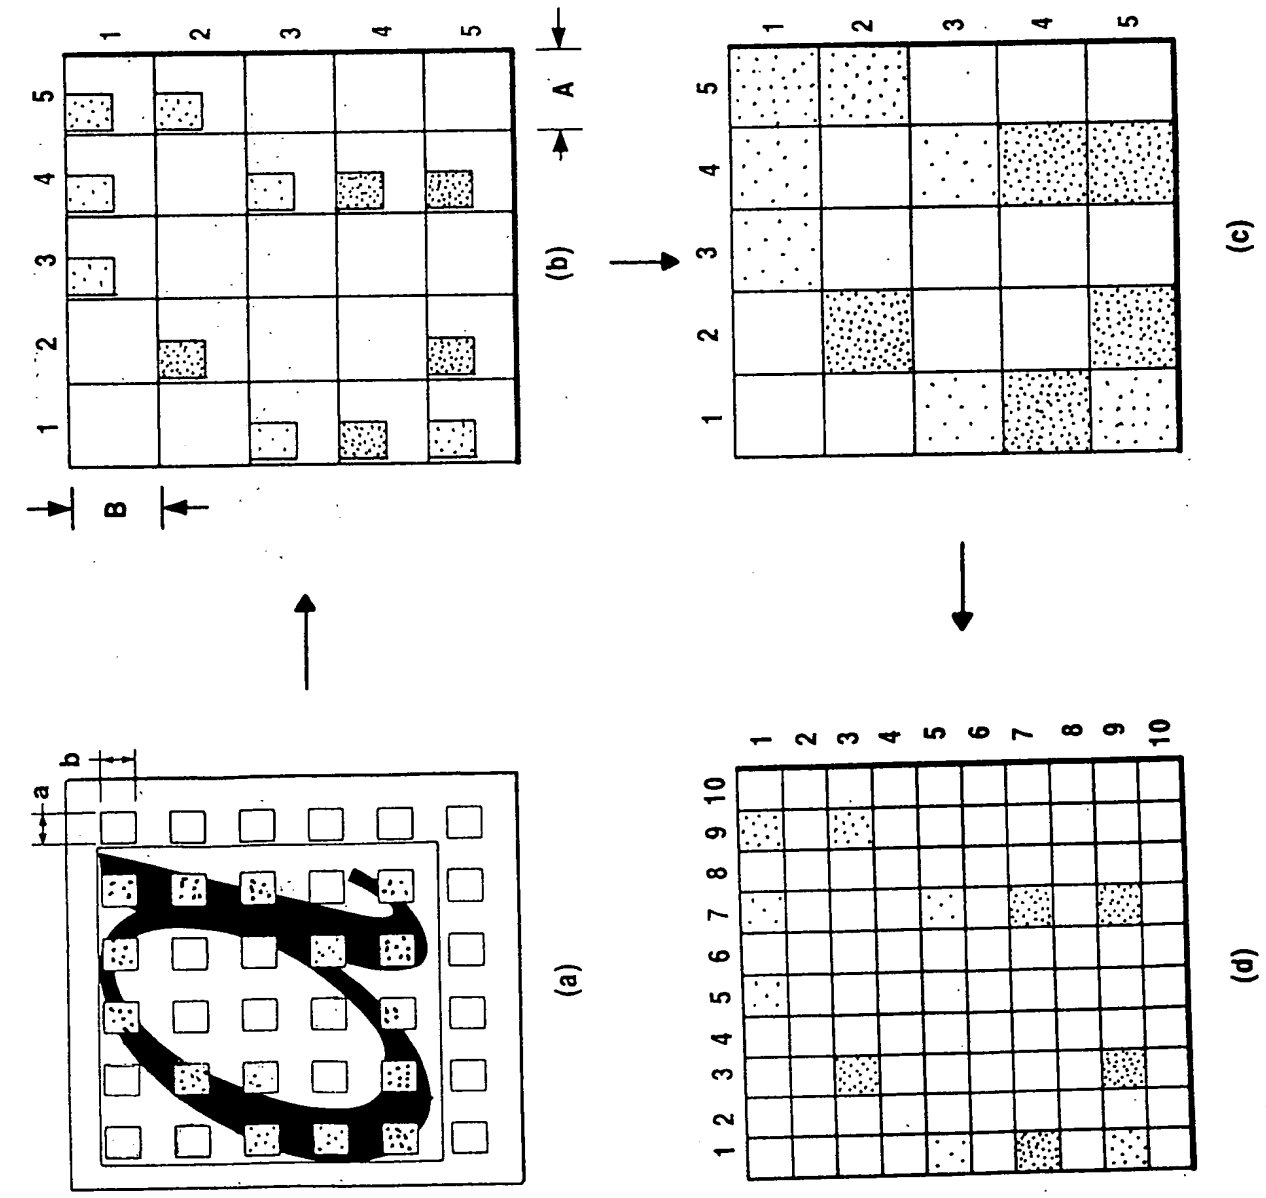

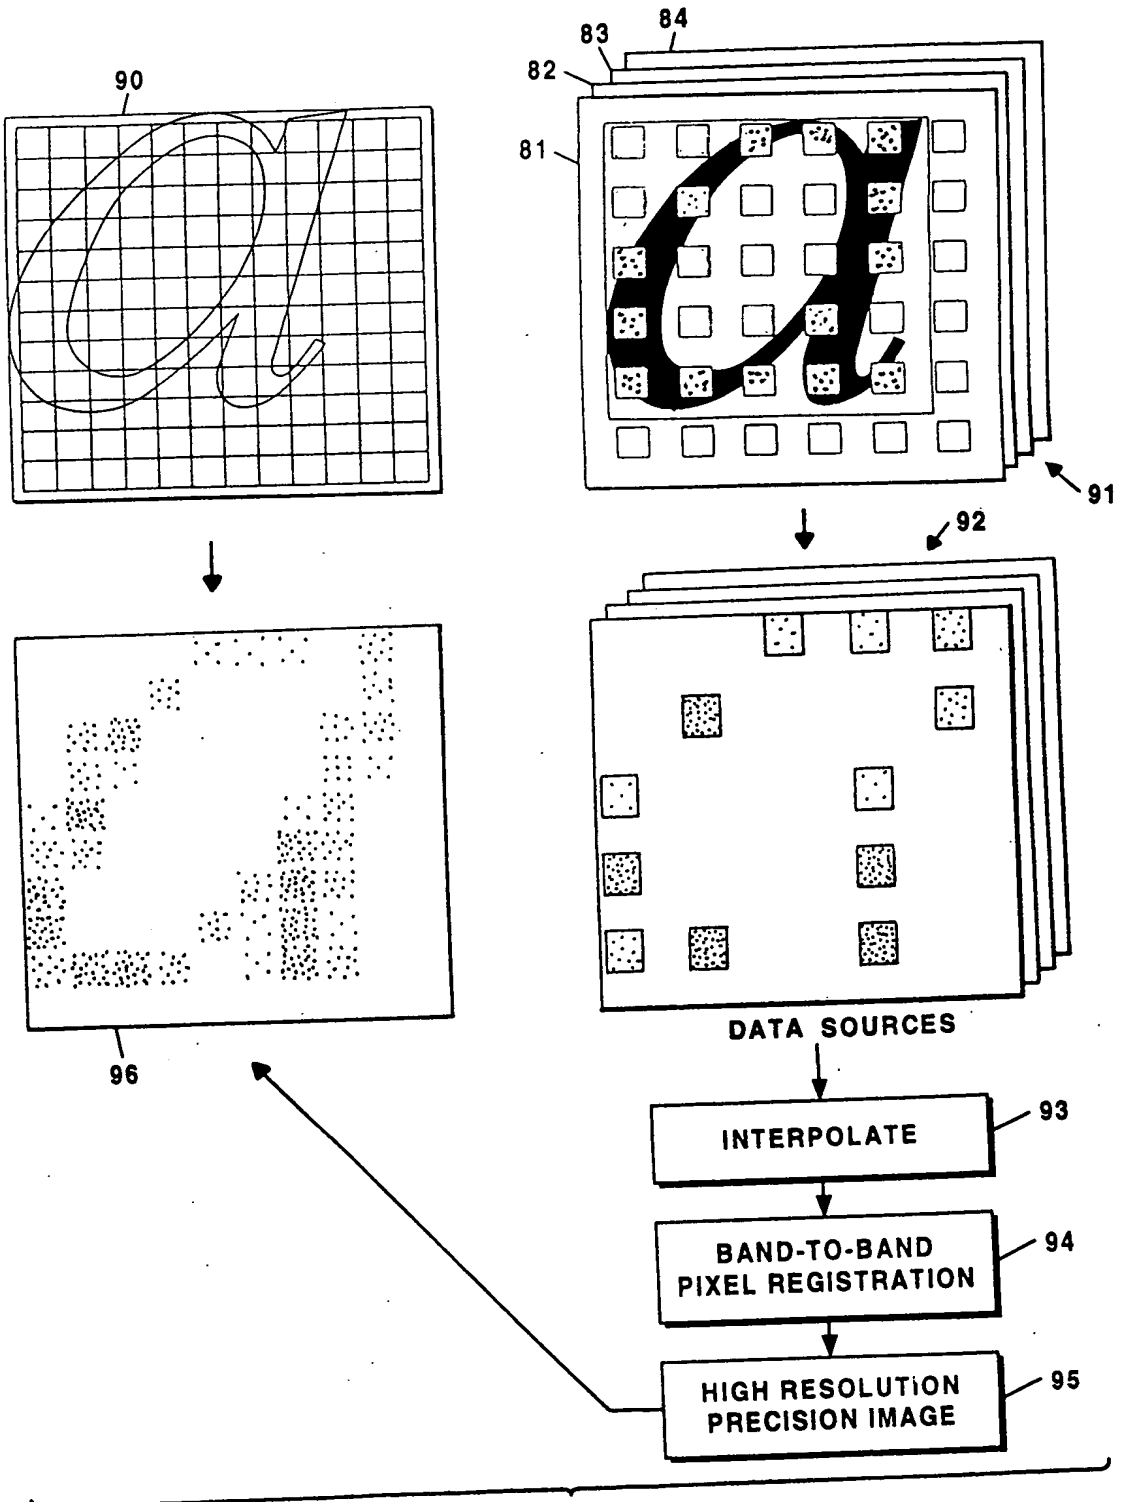
90
83
84
82
81
91
92
96
DATA SOURCES
INTERPOLATE
93
BAND-TO-BAND
PIXEL REGISTRATION
94
HIGH RESOLUTION
PRECISION IMAGE
95

Figure 7

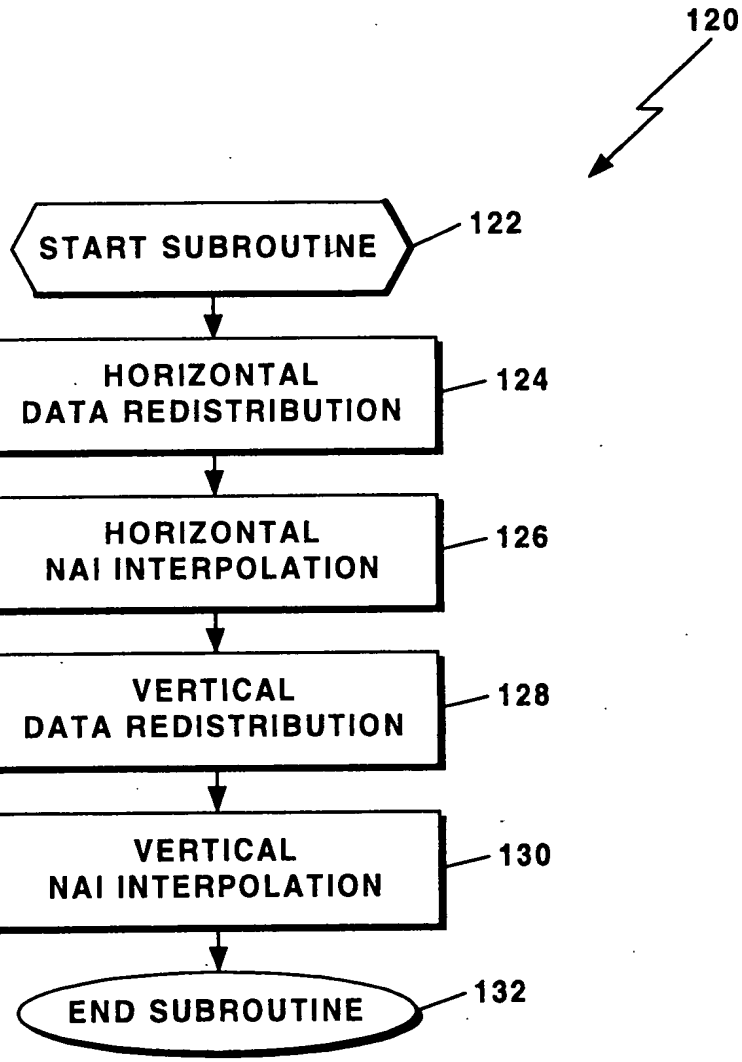
120
START SUBROUTINE
122
HORIZONTAL DATA REDISTRIBUTION
124
HORIZONTAL NAI INTERPOLATION
126
VERTICAL DATA REDISTRIBUTION
128
VERTICAL NAI INTERPOLATION
130
END SUBROUTINE
132

Figure 8

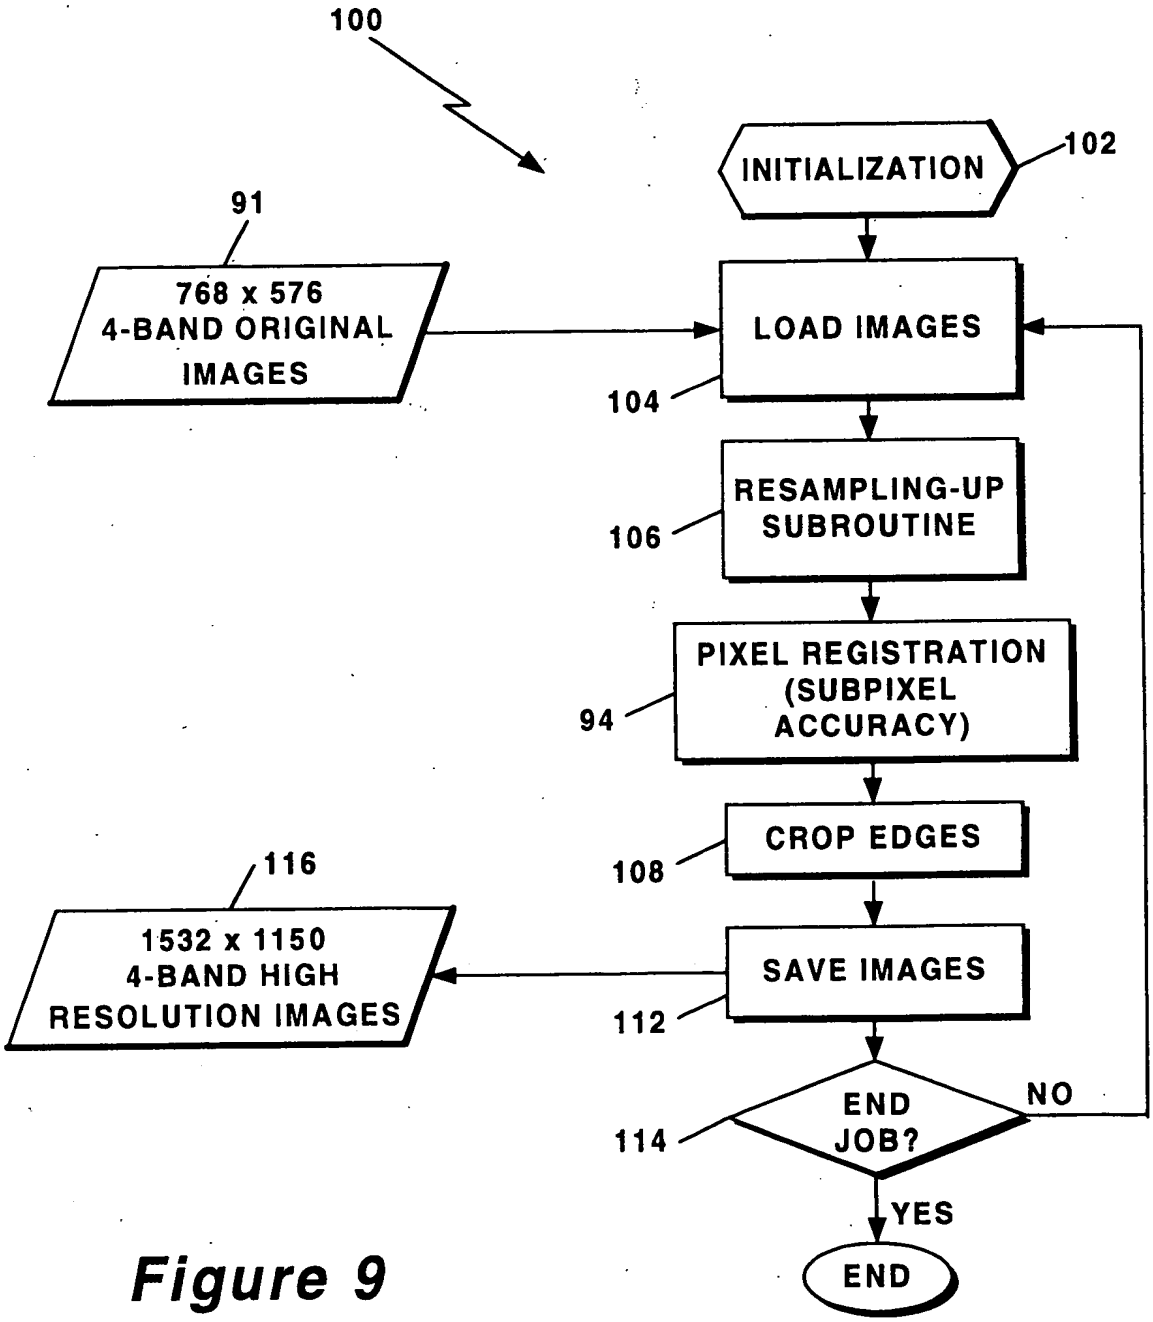
100
INITIALIZATION
102
91
768 x 576
4-BAND ORIGINAL
IMAGES
LOAD IMAGES
104
RESAMPLING-UP
SUBROUTINE
106
PIXEL REGISTRATION
(SUBPIXEL
ACCURACY)
94
CROP EDGES
108
116
1532 x 1150
4-BAND HIGH
RESOLUTION IMAGES
SAVE IMAGES
112
END
JOB?
114
NO
YES
END

Figure 9

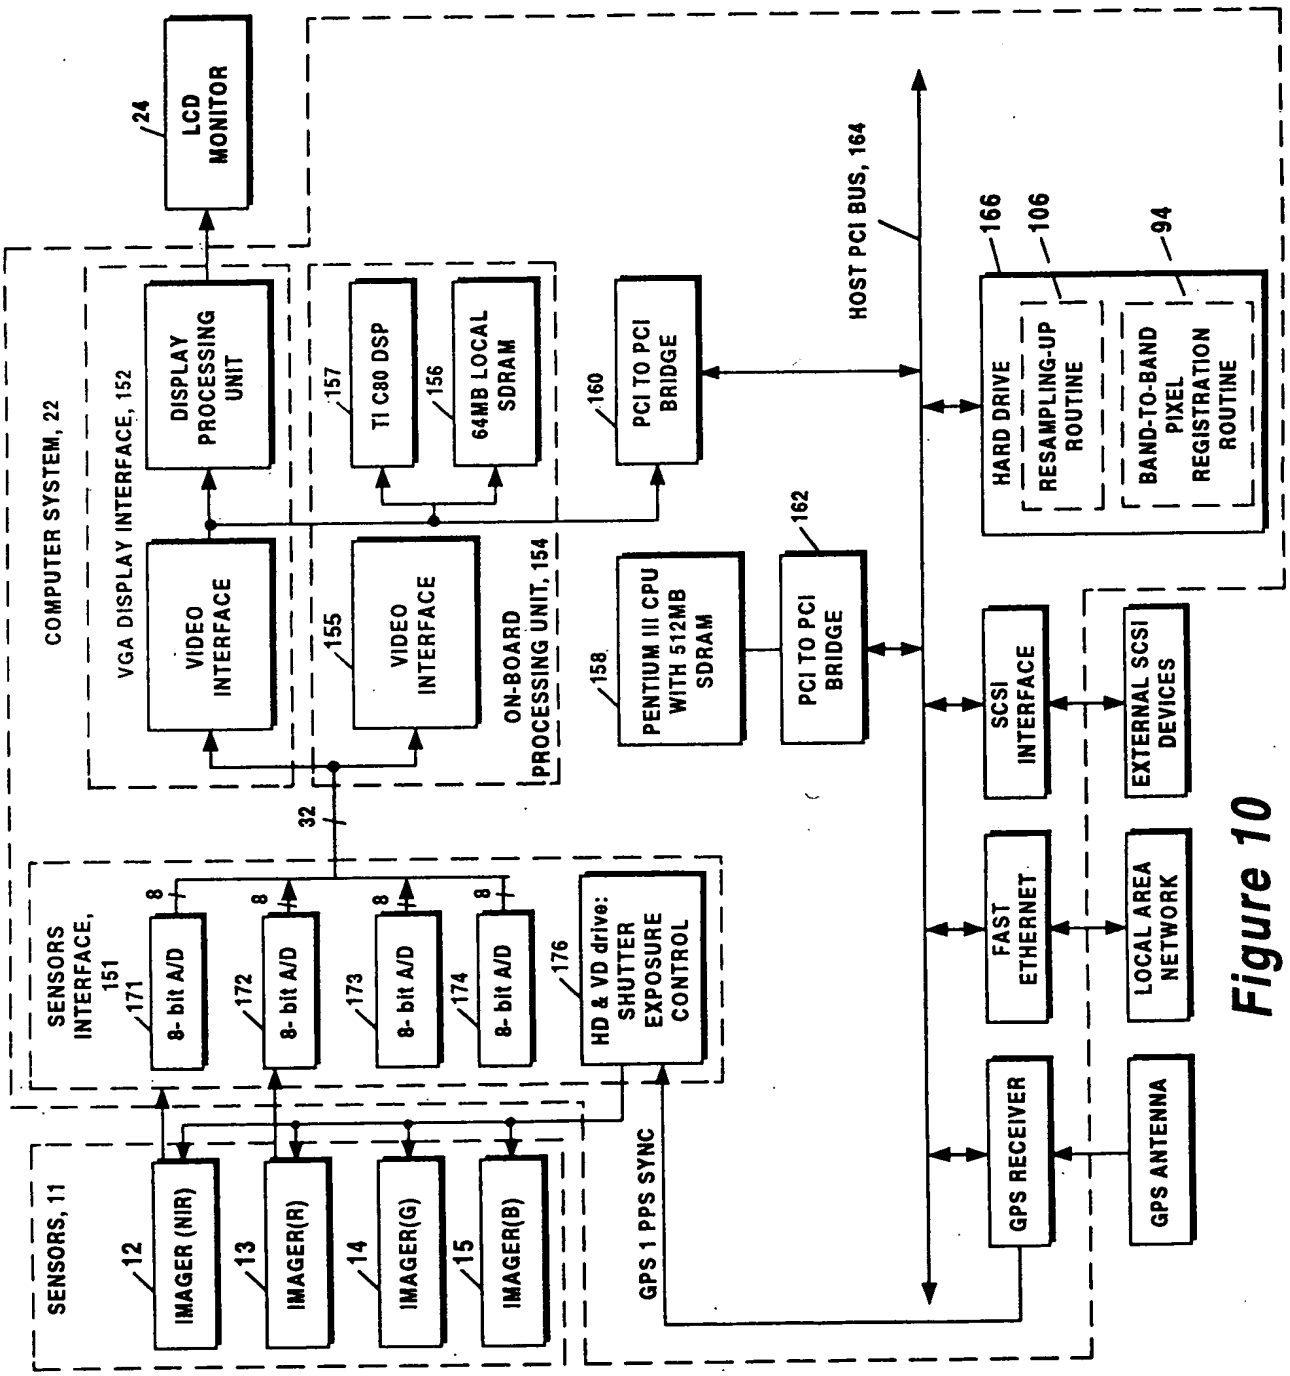
SENSORS, 11
IMAGER (NIR)
12
IMAGER(R)
13
IMAGER(G)
14
IMAGER(B)
15
SENSORS INTERFACE, 151
8- bit A/D
171
8- bit A/D
172
8- bit A/D
173
8- bit A/D
174
HD & VD drive: SHUTTER EXPOSURE CONTROL
176
8
8
8
8
32
COMPUTER SYSTEM, 22
VGA DISPLAY INTERFACE, 152
VIDEO INTERFACE
DISPLAY PROCESSING UNIT
ON-BOARD PROCESSING UNIT, 154
VIDEO INTERFACE
155
TI C80 DSP
157
64MB LOCAL SDRAM
156
PENTIUM III CPU WITH 512MB SDRAM
158
PCI TO PCI BRIDGE
160
PCI TO PCI BRIDGE
162
LCD MONITOR
24
HOST PCI BUS, 164
HARD DRIVE
166
RESAMPLING-UP ROUTINE
106
BAND-TO-BAND PIXEL REGISTRATION ROUTINE
94
SCSI INTERFACE
EXTERNAL SCSI DEVICES
FAST ETHERNET
LOCAL AREA NETWORK
GPS RECEIVER
GPS ANTENNA
GPS 1 PPS SYNC

Figure 10